


# Snap action contact miniature vacuum switch, plastic fitting. SPDT contact : Type ZD

## DIMENSIONS

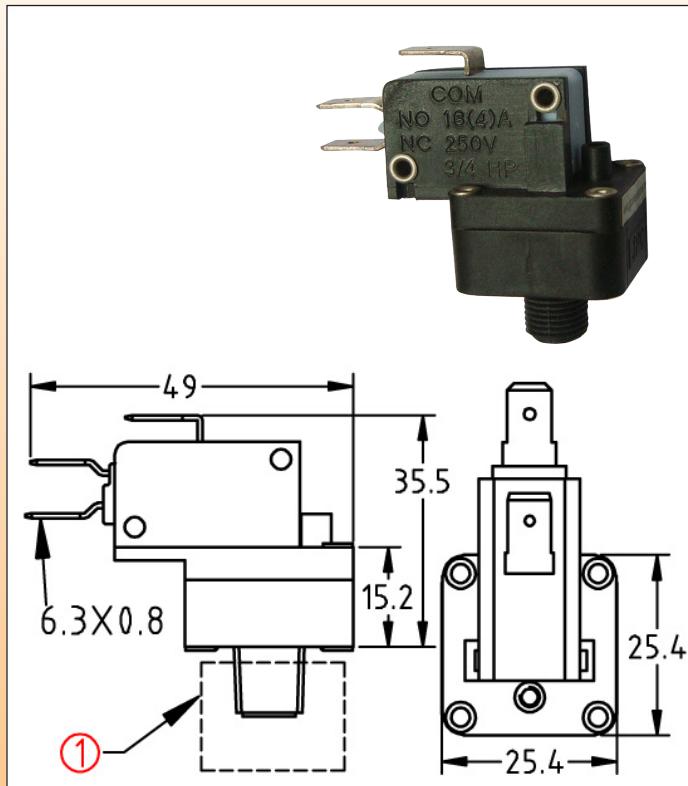

**Uses:** High electrical rating, for 250V.

**Main applications:** Vacuum detection on pumps, filters, ventilation, and electrical appliances.

**Membranes:** EPDM, dia 22 mm. Silicone or NBR on request. Double membrane on request.

**Fluid:** water or air

**Fitting:** Plastic

**Pressure:** negative (Vacuum)

**Housing:** PA66, UL94 VO

**Contact:** SPDT, snap action. NO or NC contacts available with MOQ.

**Electrical rating:** Depends on micro-switch operating force that is linked to the electrical rating

- Standard rating micro-switch (medium and high vacuum calibration only): 16A 125/250VAC; 1/2HP 125VAC; 3/4HP 250VAC. Differential about 60 mbar

- High rating micro-switch (medium and high vacuum calibration only): 2HP 240V, 21(8) A 240V (UL, CSA VDE switch). Differential about 90 mbar.

- Low force micro-switch (vacuum less than minus 150 mbar): 1/4HP 6(1) A 240V (UL, CSA VDE switch) Differential about 40 mbar.

- On request: up to 25A 250V

**Action:** momentary.

**Set point calibration:** factory calibrated and sealed, not field adjustable

**Calibration condition:** the contact between Com and NC opens when vacuum pressure goes from atmospheric pressure to requested vacuum set point.

**Set point calibration limits:** from minus 50 to minus 700 mbar


**Electrical connection:** 6.35 x 0.8 mm quick connect terminals

**Maximum pressure:** 4 bars (58 PSI)

**Maximum vacuum:** minus 700 mbar (relative pressure)

**Ambient temperature limits:** 0 to 85°C

Available pressure inlet fittings ①

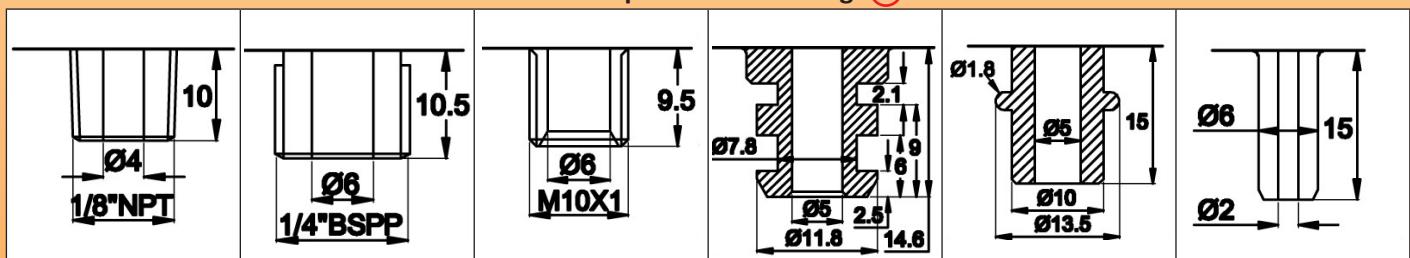

References ( with SPDT contact):

Pressure inlet	Standard rating micro-switch (Calibration : minus 200 mbar)	Low pressure micro-switch (Calibration minus 100 mbar)	High rating micro-switch (Calibration minus 300 mbar)
1/8" NPT	ZD2228U10B000000	ZD2528U50A000000	ZD2B8U60C0000000
1/4" BSPP	ZD222QU10B000000	ZD252QU50A000000	ZD2BQU60C0000000
M10 x 1	ZD222MU10B000000	ZD252MU50A000000	ZD2BMU60C0000000
Snap in fitting, 2 grooves dia 7.8	ZD222TU10B000000	ZD252TU50A000000	ZD2BTU60C0000000
Snap in fitting, 1 groove dia 10	ZD222ZU10B000000	ZD252ZU50A000000	ZD2BZU60C0000000
Snap in fitting, 1 spout dia 6 mm	ZD222AU10B000000	ZD252AU50A000000	ZD2BAU60C0000000
	Other set point values: replace B00 in the product reference by the requested value in mbar	Other set point values: replace A00 in the product reference by the requested value in mbar	Other set point values: replace 000 in the product reference by the requested value in mbar

