


PA66 connection blocks 400V range, elevated mounting



Not protected against accidental electric contact

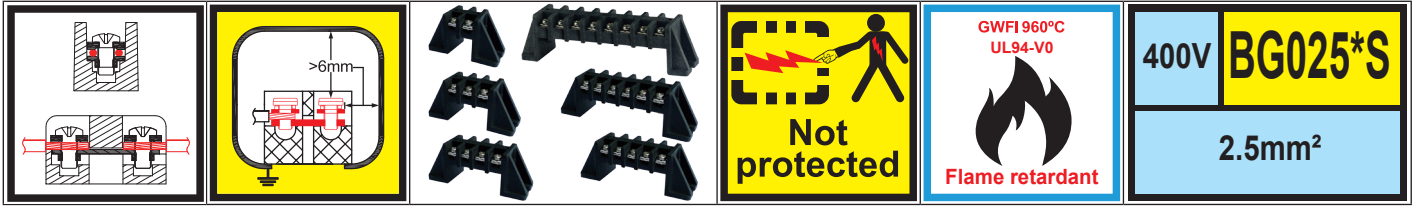

Nickel plated steel screws and square washers on both sides

BG0252SS	17 gr.	Screw terminal	BG0253SS	22 gr.
	6-7.5 mm 2 x 2.5mm ² / 2 x 1.5mm ² / 2 x 1mm ² 2 x AWG14 / 2 x AWG16 / 2 x AWG18			
BG0254SS	28 gr.	Screw terminal	BG0255SS	32 gr.
	6-7.5 mm 2 x 2.5mm ² / 2 x 1.5mm ² / 2 x 1mm ² 2 x AWG14 / 2 x AWG16 / 2 x AWG18			
BG0256SS	38 gr.	0.5 N.m M3	BG0258SS	46 gr.
	0.5 N.m M3 400V 24A Permanent 180°C/356°F Peak 200°C/392°F			

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice



Page (.pdf)



Drawing 2D (.dwg)



Drawing 3D (.stp)

Excerpt from catalogue 10-2

