


Deep drawn immersion heater fitting, 304L or 316L stainless steel, with gasket and rotation ring, for 1, 2 or 3 heating elements, Types Y3D1

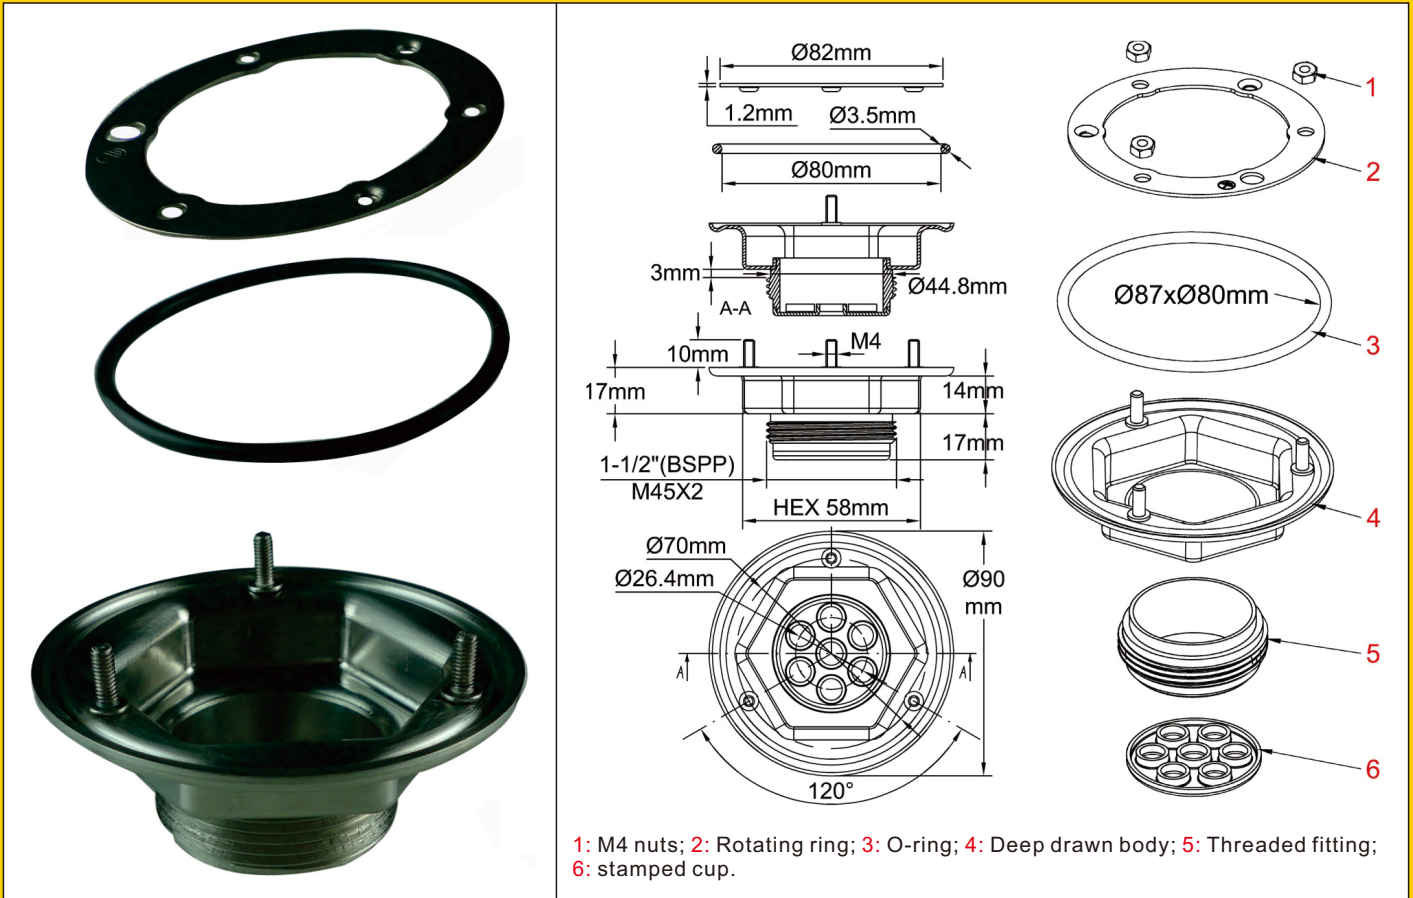

1: M4 nuts; 2: Rotating ring; 3: O-ring; 4: Deep drawn body; 5: Threaded fitting; 6: stamped cup.

Main Applications

This set, more economical than machined solutions, allows the installation of an immersion heater entirely of stainless steel on any enclosure, and requires only a dia. 75 mm drill on the bottom of the enclosure, the same as usual drill for M77x2 threads. It allows the rotation of the fitting after assembly.

The welding of the sheathed elements can be made by brazing or TIG. The TIG welding of the sheathed element assembly enables a 100% stainless steel device, required for many chemical and food applications.

Threads: 1"1/2 and M45x2 (Other threads on request, MOQ apply)

Material: 304L or 316L stainless steel (consult us for other grades)

Rotating ring: Same as the standard ring for rotary M77 and 2"1/2 fittings, tightening by 3 nuts M4.

O-ring: Silicone, dia. 80x87 mm, captive in a groove.

Wrench size: Hexagon 58mm

Gasket seat: Flat with pitch recess

Fitting: The fitting, as it does not need to be machined into the hexagonal bar 54mm on flat and 31 long 45mm depending on the model, but simply in the round bar of 48 mm and a length of 17mm, enables extraordinary material savings, up to 80%.

After optional drilling of holes for sheathed heating elements, the fitting is TIG welded on the inner lip of the deep drawn body.

It comes in 2 basic versions:

- Massive, for drilling holes on request and traditional welding or brazing of sheathed heating elements

-Hollow, with stamped cup with holes for sheathed heating elements. Then these can be either TIG welded edge to edge on the holes lips, or be traditionally brazed after TIG soldering of the cup on the fitting.

Main references with rotary ring and gasket, holes for dia. 8mm heating elements

	Parts 1, 2, 3, 4	Parts 1, 2, 3 + parts 4,5,6 welded together					
Material	Deep drawn body, without fitting, for TIG soldering	Deep drawn body for brazing, 1"1/2 thread, with 2 holes dia. 8.1 stamped cup	Deep drawn body for brazing, 1"1/2 thread, 2 holes dia. 8.1 + 1 hole dia. 8,6 stamped cup	Deep drawn body for brazing, 1"1/2 thread, with 4 holes dia. 8.1 stamped cup	Deep drawn body for brazing, 1"1/2 thread, 4 holes dia. 8.1 + 1 hole dia. 8,6 stamped cup	Deep drawn body for brazing, 1"1/2 thread, with 6 holes dia. 8.1 stamped cup	Deep drawn body for brazing, 1"1/2 thread, 6 holes dia. 8.1 + 1 hole dia. 8,6 stamped cup
316L	Y3D1160	Y3D116AC81200264	Y3D116AC81286264	Y3D116AC81400264	Y3D116AC81486264	Y3D116AC81600264	Y3D116AC81686264
304L	Y3D1040	Y3D104AC81200264	Y3D104AC81286264	Y3D104AC81400264	Y3D104AC81486264	Y3D104AC81600264	Y3D104AC81686264




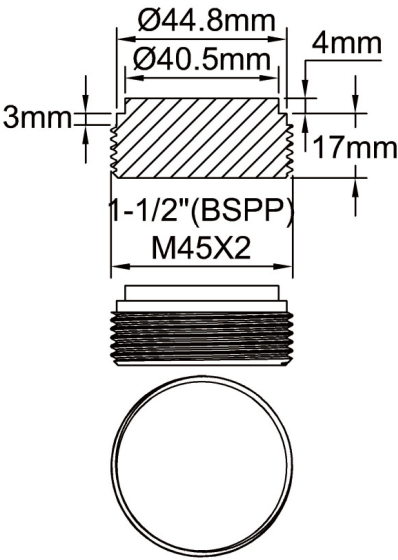
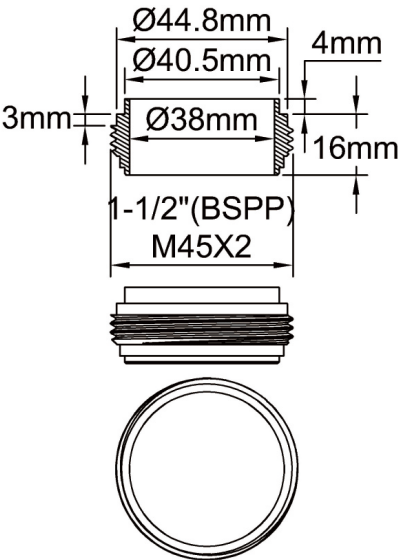
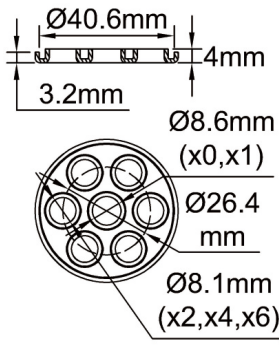
* M45x2 thread instead of 1"1/2: replace 12 by 45 in the reference

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice



Deep drawn immersion heater fitting, 304L or 316L stainless steel, with gasket and rotation ring, for 1, 2 or 3 heating elements, **Types Y3D1**

(P2)
Spare parts

					
					
Massive fitting, for drilling of sheathed heating elements on request		Hollow fitting, for TIG welding on stamped cup and on heating elements washers		Unassembled stamped cup, for prior TIG welding of sheathed heating elements	
M45x2 304L	Y3DP04RB	M45x2 304L	Y3DP04RB	2	Y3DP04D181200264
M45x2 316L	Y3DP16RB	M45x2 316L	Y3DP16RB	4	Y3DP04D181400264
1"1/2 304L	Y3DP04RA	1"1/2 304L	Y3DP04RA	6	Y3DP04D181600264
1"1/2 316L	Y3DP16RA	1"1/2 316L	Y3DP16RA	2+1	Y3DP04D181286264
				4+1	Y3DP04D181486264
				6+1	Y3DP04D181686264

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

