



Pockets, flanges, brackets and other accessories


Liquid temperature sensing with rod thermostats

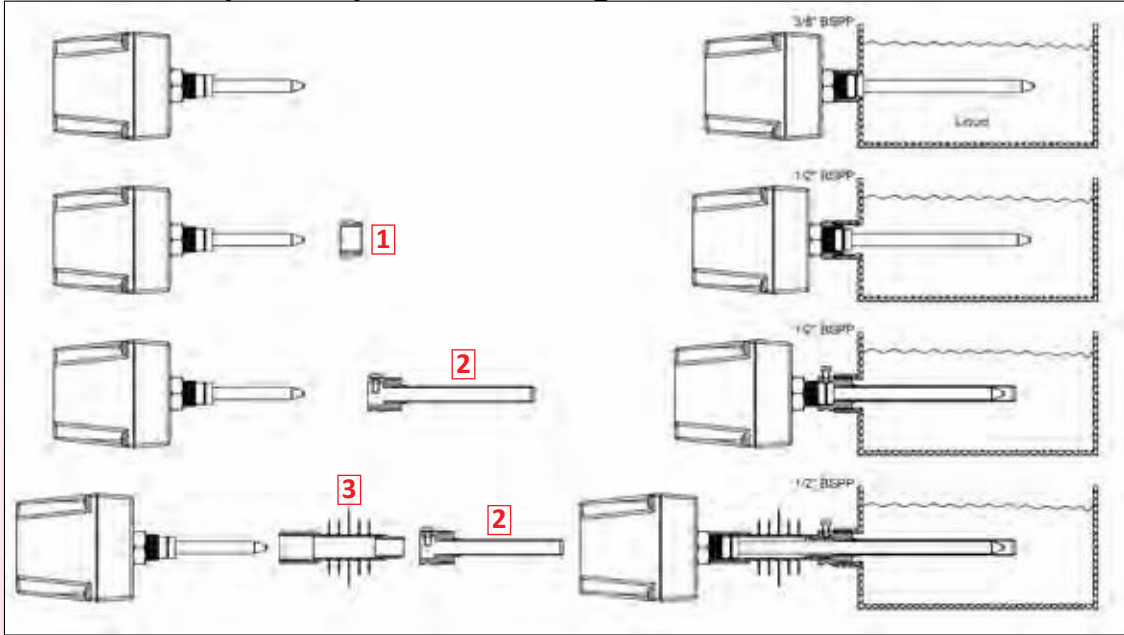

1

3/8 x 1/2", 304 stainless steel fitting (fits the 3/8" thread located under the housing)


Reference	66RI1238
-----------	----------



2

G1/2 (BSPT) Nickel plated brass pocket dia. 8.5x10mm, for rods dia. 8mm


L	References
90mm	66DK12S090710
100mm	66DK12S100710
190mm	66DK12S190710
230mm	66DK12S230710
290mm	66DK12S290710
440mm	66DK12S440710



2

G1/2 (BSPT) Nickel plated brass pocket dia. 10.5x12mm, for rods dia. 10mm


L	References
90mm	66DK12S900712
110mm	66DK12S100712
200mm	66DK12S190712
230mm	66DK12S230712
300mm	66DK12S290712
450mm	66DK12S440712



2

1/2 NPT plastic pocket dia. 8.5x14 mm for rods and bulbs dia 8 mm (Swimming pool and corrosive water applications)


Reference	66DR12510021C000
-----------	------------------



2

G1/2 (BSPT) Aisi 304 Stainless steel pocket dia. 9x10 mm, for rods dia 8mm


L (mm)	References
90mm	66DI12S090S10
100mm	66DI12S100S10
190mm	66DI12S190S10
230mm	66DI12S230S10
290mm	66DI12S290S10
440mm	66DI12S440710



2

G1/2 (BSPT) Aisi 304 Stainless steel pocket dia. 11x12 mm, for rods dia. 10mm


L	References
90mm	66DI12S090S12
100mm	66DI12S100S12
190mm	66DI12S190S12
230mm	66DI12S230S12
290mm	66DI12S290S12
440mm	66DI12S440712



2

G1/4 (BSPT) Nickel plated brass pocket dia. 8.5x10 mm, for rods dia. 8mm

L	References
100mm	66DL14P10010075N
190mm	66DL14P19010075N
290mm	66DL14P29010075N
440mm	66DL14P44010075N

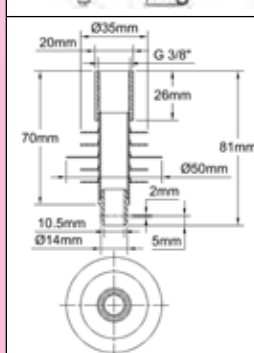

3


Rod cooler with 14.5mm termination.. Used on high temperature rod thermostats. Fits the 3/8 thread located under the housing and the dia. 14.5 hole of pockets or flanges Not usable on Y0 types

Reference	66RF07015
-----------	-----------

En raison de l'évolution technique constante de nos produits, les plans, dessins, photos et caractéristiques repris dans les pages techniques sont communiqués sans engagement et peuvent être modifiés sans préavis



Liquid temperature sensing with bulb and capillary thermostats

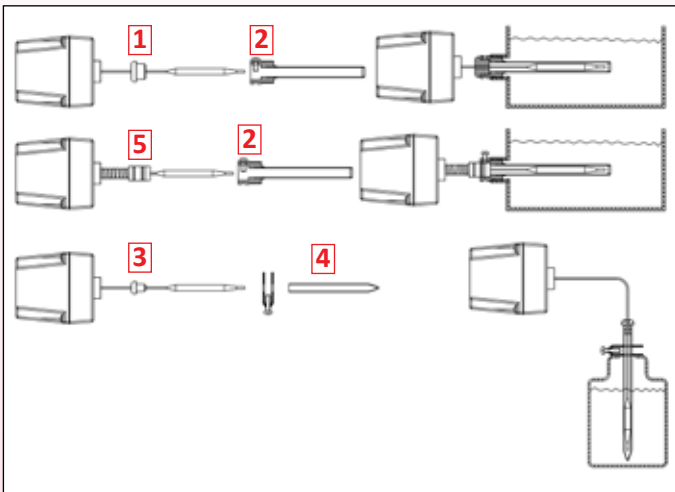

1

Silicone grommet dia. 15 mm for pockets with 14.5 mm hole

Reference	9BBJO100004008A
-----------	-----------------

2

G1/2 (BSPT) Nickel plated brass pocket dia. 6.5x8 mm, for bulbs dia. 5 and 6 mm

L	References
100mm	66DK12S100708
190mm	66DK12S190708
290mm	66DK12S290708
440mm	66DK12S440708

2

G1/2 (BSPT) Nickel plated brass pocket dia. 8.5x10 mm, for bulbs dia. 8mm

L	References
100mm	66DK12S100710
190mm	66DK12S190710
290mm	66DK12S290710
440mm	66DK12S440710

2

G1/2 (BSPT) Nickel plated brass pocket dia. 12.5x14 mm, for 2 bulbs dia. 6mm side by side

L	References
100mm	66DK12S100714
190mm	66DK12S190714
290mm	66DK12S290714
440mm	66DK12S440714

2

1/2 NPT plastic pocket dia. 8.5x 11 mm, for bulbs dia. 8mm

Reference	66DR12S10021C000
-----------	------------------

2

G1/2 (BSPT) Stainless steel pocket dia. 7x8 mm, for bulbs dia. 5 and 6mm

L	References
100mm	66DI12S100S08
190mm	66DI12S190S08
290mm	66DI12S290S08
440mm	66DI12S440708

2

G1/2 (BSPT) Stainless steel pocket dia. 9x10 mm, for bulbs dia. 8mm

L	References
100mm	66DI12S100S10
190mm	66DI12S190S10
290mm	66DI12S290S10
440mm	66DI12S440710

2

G1/4 (BSPP) Nickel plated brass pocket dia. 6.5x8 mm, for bulbs dia. 6mm

L	References
100mm	66DL14P10010065N
190mm	66DL14P19010065N
290mm	66DL14P29010065N
440mm	66DL14P44010065N

2

G1/4 (BSPP) Nickel plated brass pocket dia. 8,5x10 mm, for bulbs dia. 8mm

L	References
100mm	66DL14P10010075N
190mm	66DL14P19010075N
290mm	66DL14P29010075N
440mm	66DL14P44010075N

4

Silicone grommet dia. 7.5 mm for tubes dia. 7x8 mm

Reference	9BBJO100004 52A
-----------	-----------------

4

Aisi 304 , adjustable length mobile pocket for tanks, buckets, containers, pipe dia 7x8 mm, for bulbs dia. 6mm

Reference	66DI08500FL
-----------	-------------

5

Dia. 10 mm flexible corrugated tube output, plastic

Reference	9BBS10RA100003A
-----------	-----------------